




Horizontal Sec.

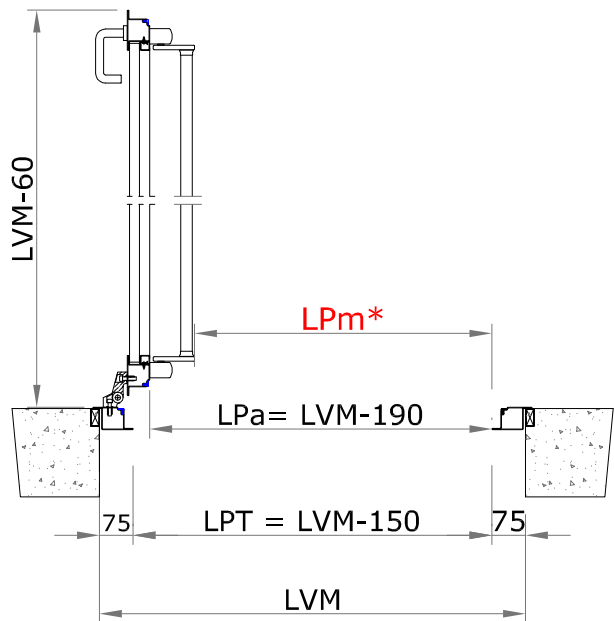

Vertical Sec.

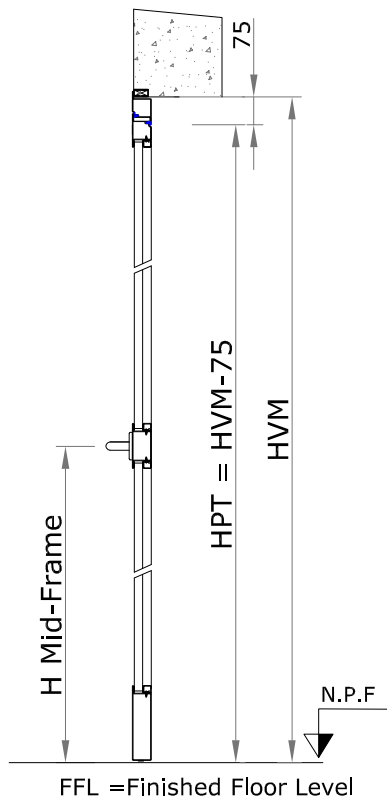

Pull side view

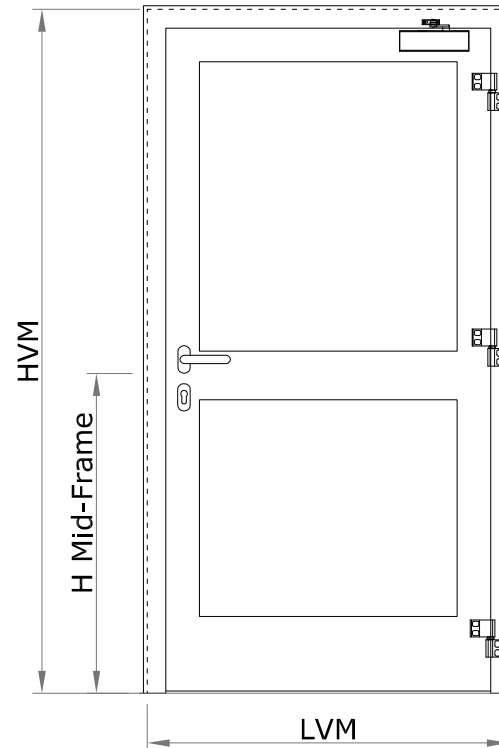

ACCESSORIES

- " V " arm door closer
- Slide arm door closer
- Couple of handle on round rose and lock profile
- Standard Lever Panic Bar
- Push-bar
- Electrical handle
- RAL

Other

LVM= Structural opening width

HVM=Structural opening height

LVP = Frame Passage Width

HVP = Frame Passage Height


LPa = Leaf Passage width

LPm*= Panic bar passage width

LPm*

Standard Lever = LVM-290() mm.

Push-bar = LVM-255() mm.

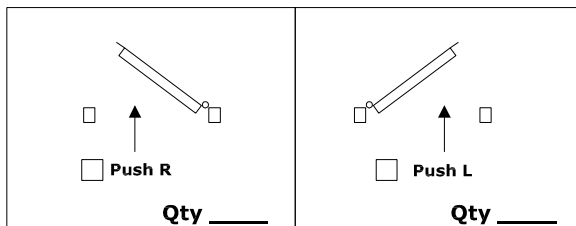

EI 30 glass (internal use)

EI 60 glass (internal use)

H Mid-Frame = _____ mm.

Dimensions mm.

LVM _____ x HVM _____

In case of fanlight please specify the full height passage (HPT)

HPT = _____



Fael Security Srl
Via E. Majorana
72100 Brindisi - ITALIA
Tel. 0831-546563 Fax 0831-546674
E-mail: fael@fael.com
Web: http://www.fael.com

VECTRA/C
STEEL OPENABLE GLAZED FIREDOORS
EI 30/60
(one leaf)
Assembly Type "2a and 2b"

Client: _____

Order n° _____ date _____

Ref. : _____

Stamp and Signature

Date: