


- ACCESSORIES**
- " V " arm door closer
  - Slide arm door closer  
A>1000 mm B>1000 mm
  - Door closer with integrated mechanical door coordinator
  - Door selector
  - Couple of handle on round rose and lock profile
  - Standard Lever Panic Bar
  - Standard Lever Panic Bar on secondary leaf
  - Push-bar
  - Push-bar on secondary leaf
  - Electrical handle
  - RAL .....

LVM= Structural opening width  
 HVM=Structural opening height  
 LVP = Frame Passage Width  
 HVP = Frame Passage Height  
 LPa = Leaf Passage width  
 LPm\* = Panic bar passage width  
 LPma\* = Panic bar leaf passage width

- LPma\*  Standard Lever = A-283 ..... ( ) mm.
- LPma\*  Push-Bar= A-246.....( ) mm.
- LPm\*  Standard Lever = LVM-536 .....( ) mm.
- LPm\*  Push-Bar = LVM-462 ..... ( ) mm.

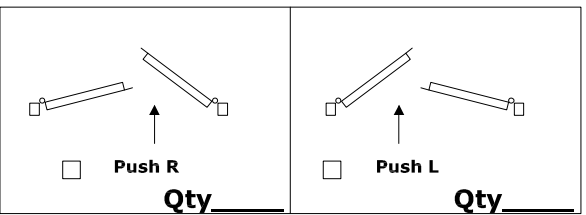

H Mid-Frame = \_\_\_\_\_ mm.

Dimensions mm.

LVM \_\_\_\_\_ x HVM \_\_\_\_\_

LVM = A+B

A=B = \_\_\_\_\_

In case of fanlight please specify the full height passage (HPT)

HPT = \_\_\_\_\_

Fael Security Srl  
 Via E. Majorana  
 72100 Brindisi - ITALIA  
 Tel. 0831-546563 Fax 0831-546674  
 E-mail: fael@fael.com  
 Web: http://www.fael.com

**VITRALL**

EI 90/120 ALUMINIUM OPENABLE  
 GLAZED FIREDOOR

SYMMETRICS TWO LEAVES

Client: \_\_\_\_\_

Order n° \_\_\_\_\_ date \_\_\_\_\_

Ref. : \_\_\_\_\_

Stamp and Signature

\_\_\_\_\_

Date: \_\_\_\_\_